




Motor Plate Inside
.220 thick - make 1
cut slots .1 deep

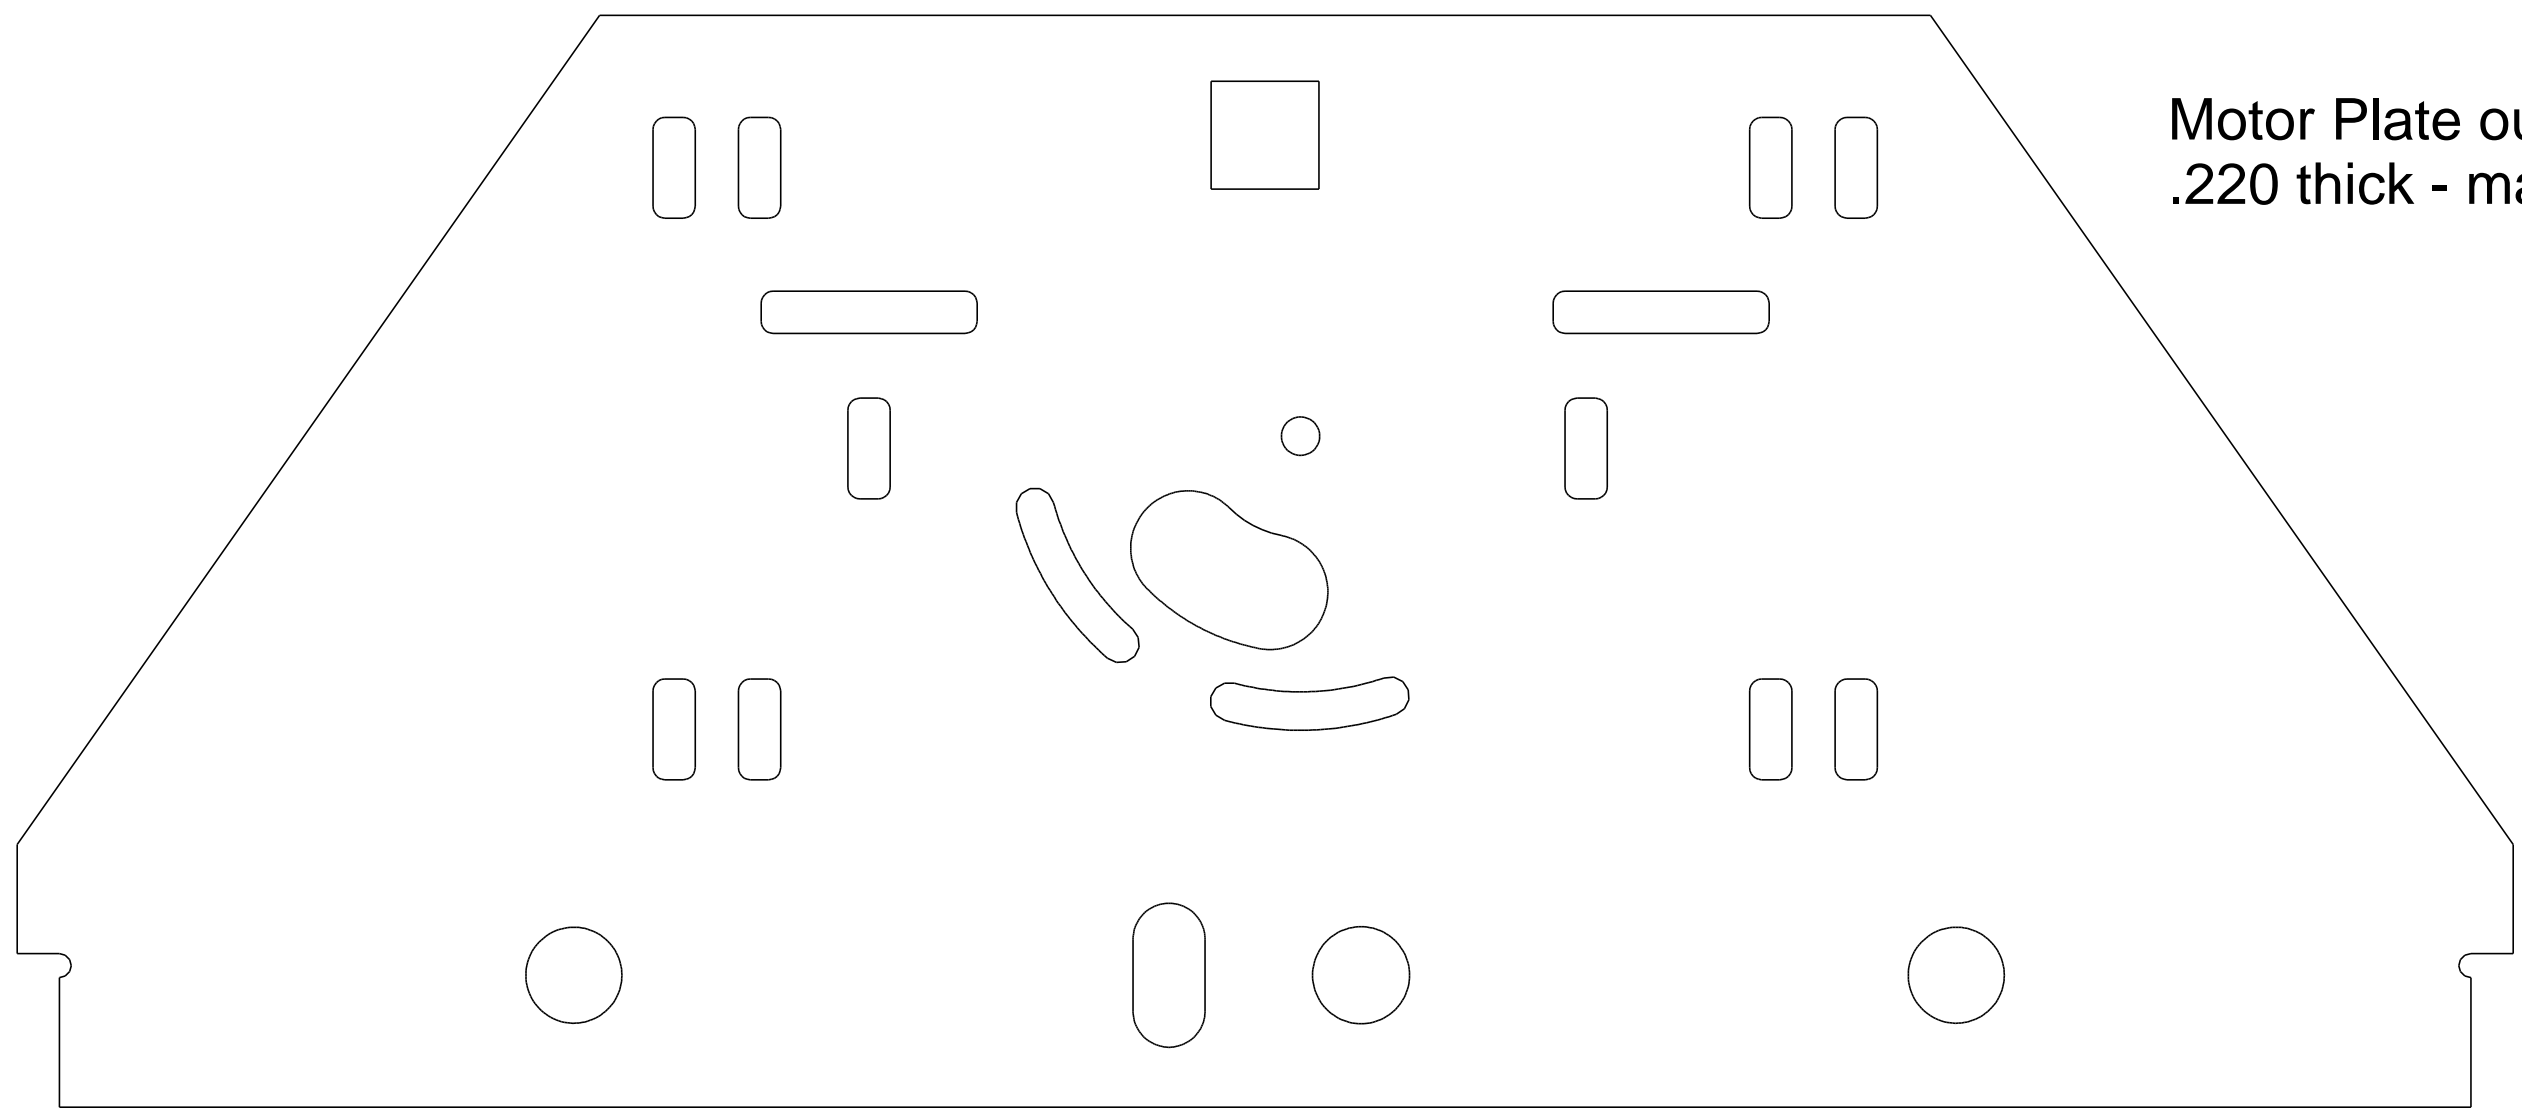


Motor Plate outside
.220 thick - make 1

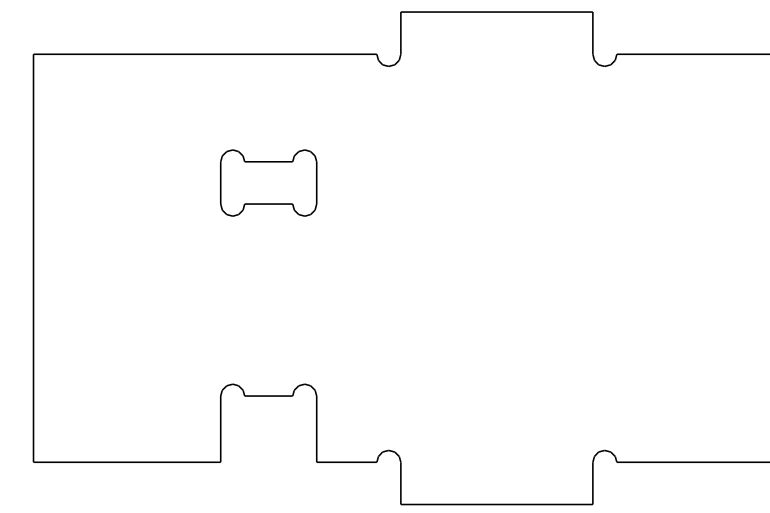


Top Cross Left
.220 thick - make 1

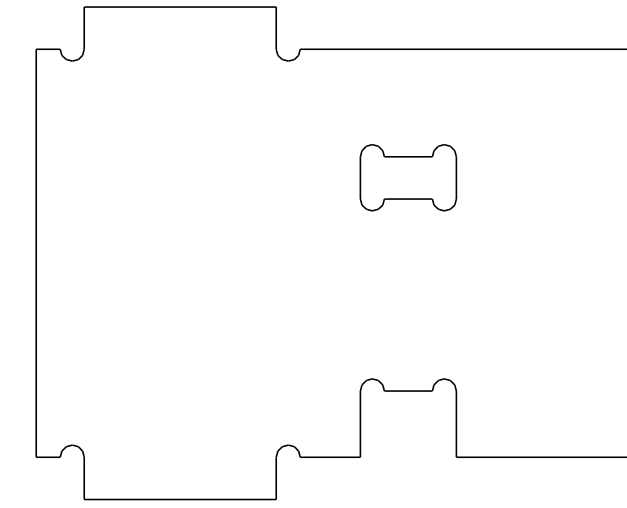


Top Cross Right
.220 thick - make 1

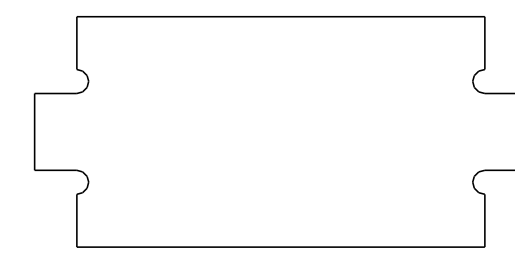


Cross Brace
.220 thick - make 2

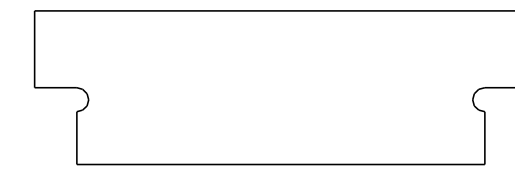


Cross Brace Short
.220 thick - make 2




Top Rib
.220 thick
make 4




Sprocket Drill Guide
6x - 8-32 bolts
.220 thick - make 1




Sprocket Spacer
6x - 8-32 bolts
.220 thick - make 2
cut pocket .1 deep




Wheel Drill Guide
6x - 8-32 bolts
.220 thick - make 1
cut pocket .1 deep

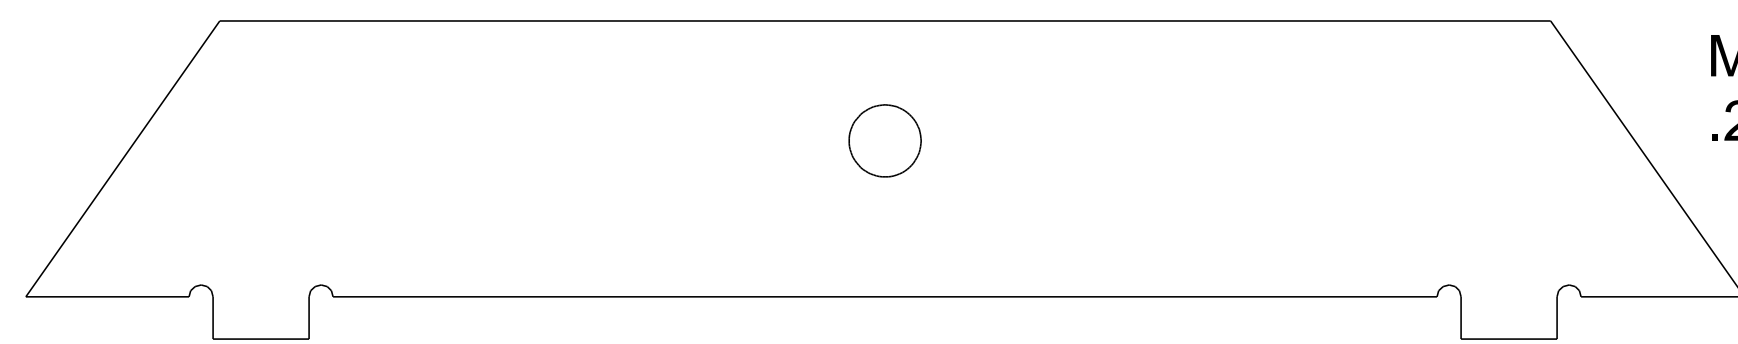


Motor Plate Spacer
.220 thick - make 1

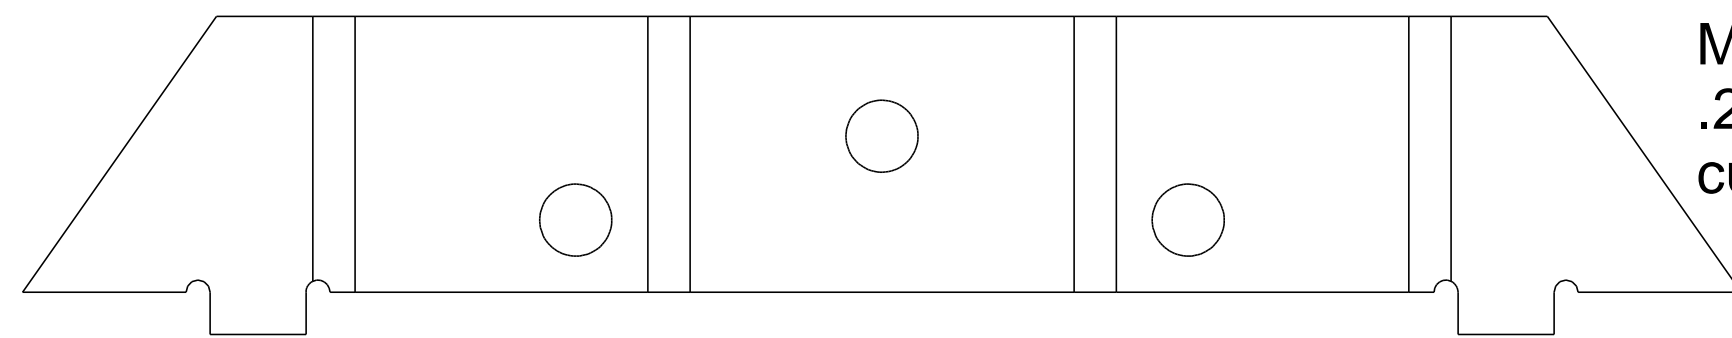

Motor Plate Spacer w Ribs
.220 thick - make 1
cut slots .1 deep

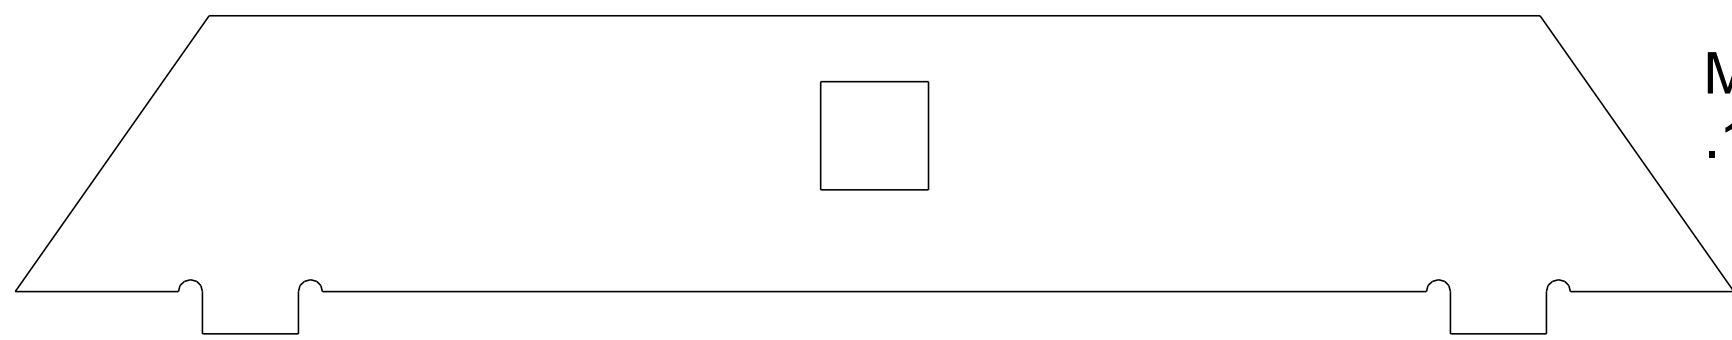


Motor Plate Spacer .125
.125 thick - make 1



Guide Rib - .220 thick - make 8

Media Conversions Outer Foot Scooter Motor Drive

Copyright Media-Conversions - Released for non-commercial use ONLY!

DRAWN	DATE				
CHECKED					
QA					
MFG					
APPROVED		SIZE C	FSCM NO.	DWG NO.	REV
		SCALE			SHEET